

iBaby Monitor

Model: M6

User Manual

Index

| | | |
|-----|----------------------------------|--------------------------------------|
| 1 | Introduction..... | 3 |
| 1.1 | The package contents..... | 3 |
| 1.2 | Product Features..... | 3 |
| 1.3 | Product Specifications..... | 3 |
| 2 | Appearance and Interface..... | 5 |
| 2.1 | Appearance..... | 5 |
| 2.2 | Back of the camera..... | 6 |
| 3 | Set-up and Installation..... | 6 |
| 4 | Returns and Exchanges..... | 9 |
| 4.1 | What is your return policy?..... | 9 |
| 4.2 | Can I exchange an item?..... | 9 |
| 5 | FCC Caution..... | 9Error! Bookmark not defined. |

1 Introduction

The iBaby monitor works with your iPod touch, iPhone or iPad so you can see and hear your baby anytime, anywhere as long as you are connected to the internet (including Wi-Fi, 3G/4G network, etc.). From your free app, you set motion/sound alerts, zoom in and snap photos so you never miss an important moment.

"This product is meant for providing convenience for baby monitoring. The manufacturer is not responsible for any legal liability caused by negligence. "

1.1 The package contents

- ✓ 1 Camera
- ✓ 1 Power Adapter
- ✓ 1 Quick Installation Guide
- ✓ 1 Base

1.2 Product Features

- ✓ Selectable video resolution for comprehensive network bandwidth & mobile device
- ✓ Local lullaby storage & playing.
- ✓ Full duplex two-way talkback
- ✓ Acoustics echo cancellation technology providing nice audio quality.
- ✓ High performance P2P technology for high reliable connectivity.
- ✓ Video & audio recording (local , iBaby cloud) , sharing (Facebook ,Youtube,etc).
- ✓ Pan & tilt support

1.3 Product Specifications


| Model:M6 | | |
|----------|---------------|--|
| Features | P2P | Support P2P |
| | WIFI setting | Monitor automatically get the IOS device is currently connected Wi-Fi account and password |
| | Cloud Storage | Support the pictures and videos stored in the cloud |
| CPU | OS | Embedded Linux OS |
| | CPU | 32Bit RSIC Embedded Processor |
| Video | Compression | H.264 baseline |

| | | |
|----------|-----------------------|--|
| | Frame rate | Max.30fps |
| | Resolution | HD(1280*720),VGA(640*480) |
| | Image Rotation | Brightness, contrast, resolution is adjustable |
| | Lens | f=4.2mm, F=2.0, Fixed Iris (2 megapixels) |
| Lighting | Minimum illumination | 0 Lux(IR on automatically) |
| | Lighting | 9pcs 12ML Infrared LEDs, 6m distance |
| Audio | Compression | G711 |
| | Audio In | One way input / Internal Microphone |
| Network | Audio Out | One way output / Internal Speaker |
| | Network interface | N/A |
| | User Access | Support 4 users visiting on the same time |
| | Protocol | TCP/IP , HTTP , UDP , DHCP , UPNP,NTP,P2P |
| | IP address | DHCP IP address |
| WIFI | Protocol | Support 802.11b/g/n |
| | Encryption | Support WEP/WPA/WPA2 encryption |
| | Setting | Monitor automatically get the IOS device is currently connected Wi-Fi account and password |
| | USB interface | Connect with IOS devices |
| | antenna port | Built-in antenna |
| PTZ | Motor | Built-in motor control |
| | Coverage | Horizontal : 355° , Vertical : 100° |
| Other | Shape material | Plastic |
| | Work environment | Indoors |
| | Power | DC5V 2A |
| | Reset | One |
| | Product power | Daytime 2.5W , night 3W |
| | Operating environment | Temperature : 0~40 °C , humidity : 30°C ≤75% |
| | Storage environment | Temperature : -40°C ~ 55°C , humidity : 40°C ≤90% |

| | | |
|---------------|------------------|--|
| | Size | Monitor size: 117mm(L)*117mm(W)*151mm(H) Package size: 173.5mm(L)*173.5mm(W)*175mm(H) |
| | Weight | Weight : 558g |
| | Package contents | Power Adapter , Quick start guide, Magnetic base |
| Software | Software | IOS6.0 or later , Android4.0 or later |
| Certification | Certification | FCC CE ROSH RCM TELEC |

2 Appearance and Interface


2.1 Back of the camera

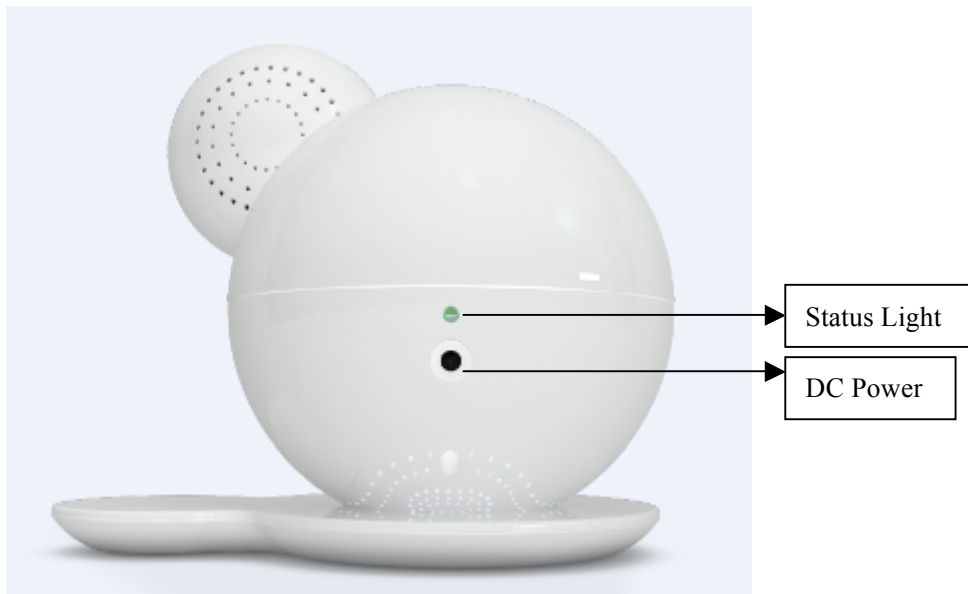

DC Power: 5V 2A power adapter (Please use the official factory power adapter to avoid possible fire hazards)

Status Light: has a total of three possible output displays, refer to latter parts of this document for their meanings

2.2 Bottom of the camera

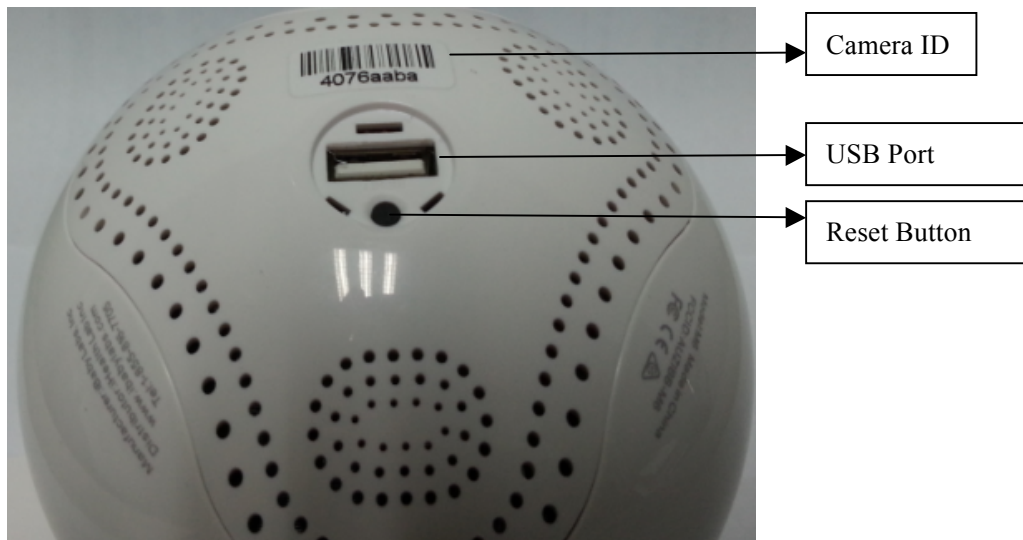


Camera ID: Printed on the bottom of each camera as shown above

USB port: used for connecting to your iOS device


RESET button: used to reset your M6 back to factory settings

3 Set-up and Installation


- a. Ensure your Android device is connected to your Wi-Fi network.
- b. Download iBaby Care App from Google Play to your supported mobile device.



- c. Close all of your smart phone apps running in the background.
- d. Plug the power cable to the baby monitor, wait for 30 seconds until the red LED lights start flashing.
- e. Connect your Android smart phone and baby monitor with a USB cable.
- f. Select 'OK' when asked, 'Open iBaby Care when this USB accessory is connected?'.

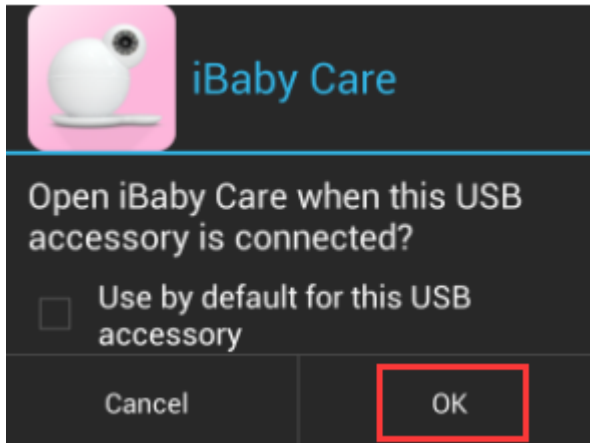


g. Create an account and log in.

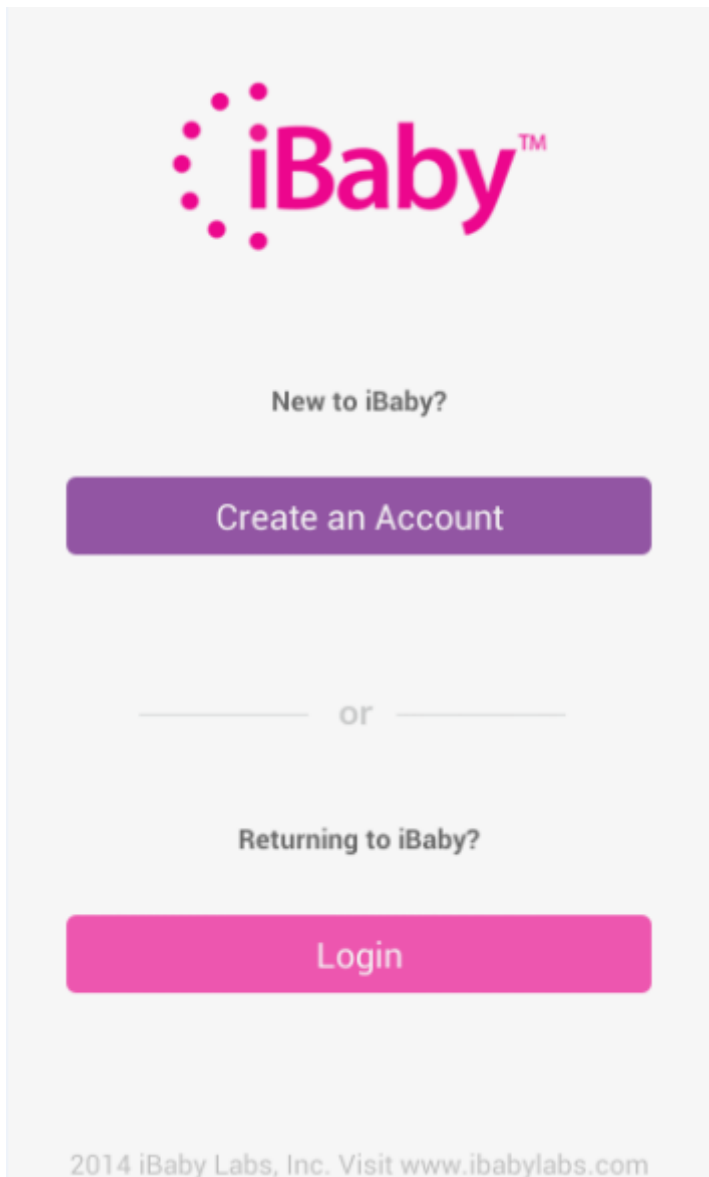

h. Click 'Next'.

[← Back](#)


Install Your M6/M6T Camera

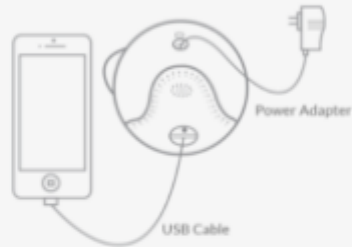

1. Connect your mobile device to Wi-Fi
2. Connect the power adapter.
3. Connect the USB cable.

Next

- i. Type in your Wi-Fi password, and click 'Trust' button. Make sure your password is correct.

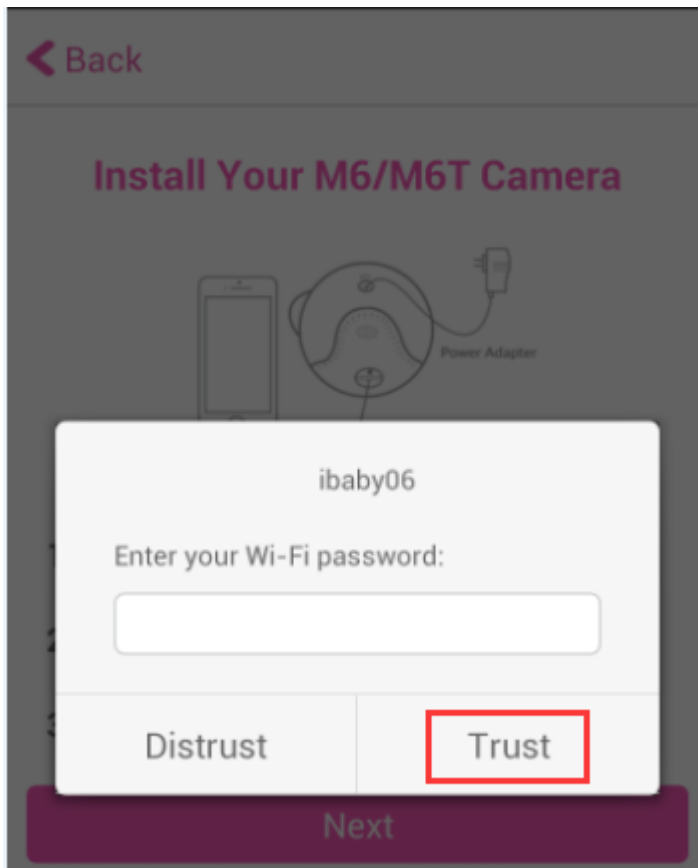

- j. Proceed to follow the simple onscreen instructions to complete the setup.

4 Returns and Exchanges

4.1 What is your return policy?

Defective merchandise may be returned to us within 30 days from the date merchandise was received. Item(s) must be returned in the condition received or, understandably, we will not be able to accept your return. We will credit your refund to the original credit card, with shipping and handling charges deducted from the refund amount.

4.2 Can I exchange an item?

Exchanges are only allowed when the merchandise is defective or damaged upon receipt.

5 FCC Caution:

Any Changes or modifications not expressly approved by the party responsible for

compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 8 inches between the radiator & your body.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.